



DM-ATR MOULDED PARTS

Anti tracking Rain Shed heat shrink

Applications


Used to provide insulation protection for cable outdoor termination.

Features

- Anti-Tracking Rain Shed
- Shrink Ratio: 2: 1, 3: 1
- Operating temperature:- 55°C to +105°C
- Minimum fully shrink temperature: 110°C
- Standard color :Red

Technical data

Test Items	Method of Test	Test Requirements
Tensile strength	ASTM D 2671	12MPa min.
Ultimate elongation	ASTM D 2671	200% min.
Volume resistivity	IEC93	10 ¹⁴ Ω.cm min.
Dielectric strength	IEC 60243	10kV/mm(3mm) min.
Water absorption	ISO 62	0.5% max.
Heat shock at 225°C/4hrs	ASTM D 2671	No cracking, dropping
Density	ASTM D 792	1.1~1.3g/cm ³

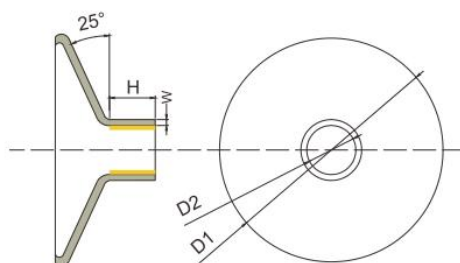

Dimensions

Size mm	D2(mm)		As Supplied (mm)		After Recovered	
	a(Min.)	B(Min.)	H(Min.)	D1(Nom.)	W(+/-10%)	h(Min.)
110 35/12	35	12	20	95	3	18
120 48/20	48	20	28	120	3.5	20
130 60/25	60	25	30	120	3.2	20
140 60/30	60	30	35	140	3.5	30
150 75/30	75	30	35	140	3.3	30
160 100/35	100	35	35	140	3.3	30